

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 063 246 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
27.12.2000 Bulletin 2000/52

(51) Int. Cl.<sup>7</sup>: **C08F 236/20**, **C08F 232/08**,  
**C08L 21/00**

(21) Application number: **00112759.6**

(22) Date of filing: **16.06.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **24.06.1999 US 339537**

(71) Applicant:  
**THE GOODYEAR TIRE & RUBBER COMPANY**  
**Akron, Ohio 44316-0001 (US)**

(72) Inventors:  
• **Blok, Edward John**  
**Wadsworth, Ohio 44281 (US)**

• **Kraleovich, Mark Leslie, Jr.**  
**Copley, Ohio 44321 (US)**  
• **Wideman, Lawson Gibson**  
**Hudson, Ohio 44236 (US)**  
• **Sandstrom, Paul Harry**  
**Tallmadge, Ohio 44278 (US)**  
• **Ruscak, Joseph Miles**  
**Akron, Ohio 44313 (US)**

(74) Representative: **Leitz, Paul**  
**Goodyear Technical Center-Luxembourg**  
**Patent-Department**  
**L-7750 Colmar-Berg (LU)**

(54) **Polymeric resinous material derived from limonene, dimethyl-dicyclopentadiene, indene and vinyl toluene**

(57) The present application relates to polymeric resinous material comprising

- (1) from 5 to 70 weight percent units derived from limonene;
  - (2) from 5 to 70 weight percent units derived from dimethyl-dicyclopentadiene;
  - (3) from 5 to 45 weight percent units derived from indene; and
  - (4) from 5 to 45 weight percent units derived from vinyl toluene;
- wherein the sum of the weight percent units derived from limonene and dimethyl-dicyclopentadiene range from 40 to 75 weight percent units of the resin and the sum of the weight percent units derived from indene and vinyl toluene range from 25 to 60 weight percent units of the resin.

**EP 1 063 246 A1**

## Description

### Background of the Invention

[0001] Polymeric resins have been used in treads of tires to improve traction. Unfortunately, one consequence of their use is a decrease in durability and treadwear.

[0002] Polymeric resinous materials containing units derived from piperylene, units derived from 2-methyl-2-butene and units derived from dicyclopentadiene are commercially available from The Goodyear Tire & Rubber Company under the designation WINGTACK® 115. These polymeric resinous materials find use in adhesives.

### Summary of the Invention

[0003] The present invention relates to a polymeric resinous material derived from limonene, dimethyl-dicyclopentadiene, indene and vinyl toluene.

### Detailed Description of the Invention

[0004] There is disclosed a polymeric resinous material comprising

- (a) from 5 to 70 weight percent units derived from limonene;
  - (b) from 5 to 70 weight percent units derived from dimethyl-dicyclopentadiene;
  - (c) from 5 to 45 weight percent units derived from indene; and
  - (d) from 5 to 45 weight percent units derived from vinyl toluene;
- wherein the sum of the weight percent units derived from limonene and dimethyl-dicyclopentadiene range from 40 to 75 weight percent units of the resin and the sum of the weight percent units derived from indene and vinyl toluene range from 25 to 60 weight percent units of the resin.

[0005] In addition, there is disclosed a rubber composition comprising (a) a diene-based elastomer containing olefinic unsaturation and (b) 1 to 80 phr of a polymeric resinous material comprising

- (1) from 5 to 70 weight percent units derived from limonene;
  - (2) from 5 to 70 weight percent units derived from dimethyl-dicyclopentadiene;
  - (3) from 5 to 45 weight percent units derived from indene; and
  - (4) from 5 to 45 weight percent units derived from vinyl toluene;
- wherein the sum of the weight percent units derived from limonene and dimethyl-dicyclopentadiene range from 40 to 75 weight percent units of the resin and the sum of the weight percent units derived from indene and vinyl toluene range from 25 to 60 weight percent units of the resin.

[0006] In addition, there is disclosed a pneumatic tire having a tread comprised of (a) a diene-based elastomer containing olefinic unsaturation and (b) 1 to 80 phr of a polymeric resinous material comprising

- (1) from 5 to 70 weight percent units derived from limonene;
  - (2) from 5 to 70 weight percent units derived from dimethyl-dicyclopentadiene;
  - (3) from 5 to 45 weight percent units derived from indene; and
  - (4) from 5 to 45 weight percent units derived from vinyl toluene;
- wherein the sum of the weight percent units derived from limonene and dimethyl-dicyclopentadiene range from 40 to 75 weight percent units of the resin and the sum of the weight percent units derived from indene and vinyl toluene range from 25 to 60 weight percent units of the resin.

[0007] The polymeric resinous material for use in the present invention comprises from 5 to 70 weight percent units derived from limonene; from 5 to 70 weight percent units derived from dimethyl-dicyclopentadiene; from 5 to 45 weight percent units derived from indene; and 5 to 45 weight percent units derived from vinyl toluene. Preferably, the resin comprises from 20 to 30 weight percent units derived from limonene; from 20 to 30 weight percent units derived from dimethyl-dicyclopentadiene; from 20 to 30 weight percent units derived from indene; and from 20 to 30 weight percent units derived from vinyl toluene.

[0008] In a particularly preferred embodiment, the weight ratio of units derived from limonene:dimethyl-dicyclopentadiene:indene:vinyl toluene is 1:1:1:1.

[0009] The polymeric resin is particularly suited for use in a diene-based elastomer in an amount ranging from 1 to

80 phr (parts by weight per 100 parts by weight of rubber). Preferably, the polymeric resin is present in an amount ranging from 10 to 40 phr.

**[0010]** The resins may be prepared using various anhydrous metallic halide catalysts. Representative examples of such catalysts are fluorides, chlorides and bromides, of aluminum, tin and boron. Such catalysts include, for example, aluminum chloride, stannic chloride and boron trifluoride. Alkyl aluminum dihalides are also suitable, representative examples of which are methyl aluminum dichloride, ethyl aluminum dichloride and isopropyl aluminum dichloride.

**[0011]** In carrying out the polymerization reaction, the hydrocarbon mixture is brought into contact with the anhydrous halide catalyst. Generally, the catalyst is used in particulate form having a particle size in the range of from 5 to 200 mesh size, although larger or smaller particles can be used. The amount of catalyst used is not critical although sufficient catalyst must be used to cause a polymerization reaction to occur. The catalyst may be added to the olefinic hydrocarbon mixture or the hydrocarbon mixture may be added to the catalyst. If desired, the catalyst and mixture of hydrocarbons can be added simultaneously or intermittently to a reactor. The reaction can be conducted continuously or by batch process techniques generally known to those skilled in the art.

**[0012]** The reaction is conveniently carried out in the presence of a diluent because it is usually exothermic. Various diluents which are inert in that they do not enter into the polymerization reaction may be used. Representative examples of inert diluents are aliphatic hydrocarbons such as pentane, hexane, cyclohexane and heptane, aromatic hydrocarbons such as toluene, xylene and benzene, and unreacted residual hydrocarbons from the reaction.

**[0013]** A wide range of temperatures can be used for the polymerization reaction. The polymerization can be carried out at temperatures in the range of from -20°C to 100°C, although usually the reaction is carried out at a temperature in the range of from 0°C to 50°C. The polymerization reaction pressure is not critical and may be atmospheric or above or below atmospheric pressure. Generally, a satisfactory polymerization can be conducted when the reaction is carried out at autogenous pressure developed by the reactor under the operating conditions used. The time of the reaction is not generally critical and reaction times can vary from a few seconds to 12 hours or more.

**[0014]** Upon completion of the reaction the hydrocarbon mixture is neutralized followed by isolation of the resin solution. The resin solution is steam-distilled with the resulting matter resin being allowed to cool.

**[0015]** The resinous materials of this invention are characterized by having a softening point of from 100°C to 165°C, according to ASTM Method E28, good heat stability and a specific gravity of from 0.85 to 1.0. They typically have a softening point of 100°C to 165°C after steam-stripping or vacuum-stripping to remove lower molecular weight compounds; although, when prepared in the presence of a chlorinated hydrocarbon solvent, their softening point is increased within that range. These resins are generally soluble in aliphatic hydrocarbons such as pentane, hexane, heptane and aromatic hydrocarbons such as benzene and toluene.

**[0016]** The tread of the tire of the present invention contains an elastomer containing olefinic unsaturation. The phrase "rubber or elastomer containing olefinic unsaturation" is intended to include both natural rubber and its various raw and reclaim forms as well as various synthetic rubbers. In the description of this invention, the terms "rubber" and "elastomer" may be used interchangeably, unless otherwise prescribed. The terms "rubber composition," "compounded rubber" and "rubber compound" are used interchangeably to refer to rubber which has been blended or mixed with various ingredients and materials and such terms are well known to those having skill in the rubber mixing or rubber compounding art. Representative synthetic polymers are the homopolymerization products of butadiene and its homologues and derivatives, for example, methylbutadiene, dimethylbutadiene and pentadiene as well as copolymers such as those formed from butadiene or its homologues or derivatives with other unsaturated monomers. Among the latter are acetylenes, for example, vinyl acetylene; olefins, for example, isobutylene, which copolymerizes with isoprene to form butyl rubber; vinyl compounds, for example, acrylic acid, acrylonitrile (which polymerize with butadiene to form NBR), methacrylic acid and styrene, the latter compound polymerizing with butadiene to form SBR, as well as vinyl esters and various unsaturated aldehydes, ketones and ethers, e.g., acrolein, methyl isopropenyl ketone and vinyl ethyl ether. Specific examples of synthetic rubbers include neoprene (polychloroprene), polybutadiene (including cis-1,4-polybutadiene), polyisoprene (including cis-1,4-polyisoprene), butyl rubber, styrene/isoprene/butadiene rubber, copolymers of 1,3-butadiene or isoprene with monomers such as styrene, acrylonitrile and methyl methacrylate, as well as ethylene/propylene terpolymers, also known as ethylene/propylene/diene monomer (EPDM) and, in particular, ethylene/propylene/dicyclopentadiene terpolymers. The preferred rubber or elastomers are polybutadiene and SBR.

**[0017]** In one aspect, the rubber is preferably of at least two of diene-based rubbers. For example, a combination of two or more rubbers is preferred such as cis 1,4-polyisoprene rubber (natural or synthetic, although natural is preferred), 3,4-polyisoprene rubber, styrene-isoprene copolymer, styrene/isoprene/butadiene rubber, emulsion and solution polymerization derived styrene/butadiene rubbers, cis 1,4-polybutadiene rubbers and emulsion polymerization prepared butadiene/acrylonitrile copolymers.

**[0018]** In one aspect of this invention, an emulsion polymerization derived styrene/butadiene (E-SBR) might be used having a relatively conventional styrene content of 20 to 28 weight percent bound styrene or, for some applications, an E-SBR having a medium to relatively high bound styrene content; namely, a bound styrene content of 30 to 55 percent.

[0019] The relatively high styrene content of 30 to 55 for the E-SBR can be considered beneficial for a purpose of enhancing traction, or skid resistance, of the tire tread. The presence of the E-SBR itself is considered beneficial for a purpose of enhancing processability of the uncured elastomer composition mixture, especially in comparison to a utilization of a solution polymerization prepared SBR (S-SBR).

5 [0020] By emulsion polymerization prepared E-SBR, it is meant that styrene and 1,3-butadiene are copolymerized as an aqueous emulsion. Such are well known to those skilled in such art. The bound styrene content can vary, for example, from 5 to 55 percent. In one aspect, the E-SBR may also contain acrylonitrile to form a terpolymer rubber, as E-SBAR, in amounts, for example, of 2 to 30 weight percent bound acrylonitrile in the terpolymer.

10 [0021] Emulsion polymerization prepared styrene/butadiene/acrylonitrile terpolymer rubbers containing 2 to 40 weight percent bound acrylonitrile in the terpolymer are also contemplated as diene-based rubbers for use in this invention.

[0022] The solution polymerization prepared SBR (S-SBR) typically has a bound styrene content in a range of 5 to 60, preferably 10 to 45, percent. The S-SBR can be conveniently prepared, for example, by organo lithium catalyzation in the presence of an organic hydrocarbon solvent.

15 [0023] A purpose of using S-SBR is for improved tire rolling resistance as a result of lower hysteresis when it is used in a tire tread composition.

[0024] The 3,4-polyisoprene rubber (3,4-PI) is considered beneficial for a purpose of enhancing the tire's traction when it is used in a tire tread composition. The 3,4-PI and use thereof is more fully described in US-A-5,087,668. The T<sub>g</sub> refers to the glass transition temperature which can conveniently be determined by a differential scanning calorimeter at a heating rate of 10°C per minute.

20 [0025] The cis 1,4-polybutadiene rubber (BR) is considered to be beneficial for a purpose of enhancing the tire tread's wear, or treadwear. Such BR can be prepared, for example, by organic solution polymerization of 1,3-butadiene. The BR may be conveniently characterized, for example, by having at least a 90 percent cis 1,4-content.

[0026] The cis 1,4-polyisoprene (synthetic) and cis 1,4-polyisoprene natural rubber are well known to those having skill in the rubber art.

25 [0027] The term "phr" as used herein, and according to conventional practice, refers to "parts by weight of a respective material per 100 parts by weight of rubber, or elastomer."

[0028] In one embodiment, the rubber composition in the tread contains a sufficient amount of filler to contribute a reasonably high modulus and high resistance to tear. The filler may be added in amounts ranging from 10 to 250 phr. When the filler is silica, the silica is generally present in an amount ranging from 10 to 80 phr. Preferably, the silica is present in an amount ranging from 15 to 70 phr. When the filler is carbon black, the amount of carbon black will vary from 0 to 150 phr. Preferably, the amount of carbon black will range from 0 to 110 phr.

30 [0029] The commonly employed particulate precipitated silica used in rubber compounding applications can be used as the silica in this invention. These precipitated silicas include, for example, those obtained by the acidification of a soluble silicate; e.g., sodium silicate.

35 [0030] Such silicas might be characterized, for example, by having a BET surface area, as measured using nitrogen gas, preferably in the range of 40 to 600, and more usually in a range of 50 to 300 square meters per gram. The BET method of measuring surface area is described in the Journal of the American Chemical Society, Volume 60, page 304 (1930).

40 [0031] The silica may also be typically characterized by having a dibutylphthalate (DBP) absorption value in a range of 100 to 400, and more usually 150 to 300.


[0032] The silica might be expected to have an average ultimate particle size, for example, in the range of 0.01 to 0.05 micron as determined by the electron microscope, although the silica particles may be even smaller, or possibly larger, in size.

45 [0033] Various commercially available silicas may be considered for use in this invention such as, only for example herein, and without limitation, silicas commercially available from PPG Industries under the Hi-Sil trademark with designations 210, 243, etc; silicas available from Rhone-Poulenc, with, for example, designations of Z1165MP and Z165GR and silicas available from Degussa AG with, for example, designations VN2 and VN3, etc.

50 [0034] The processing of the sulfur vulcanizable rubber may be conducted in the presence of a sulfur containing organosilicon compound. Examples of suitable sulfur containing organosilicon compounds are of the formula:



in which Z is selected from the group consisting of

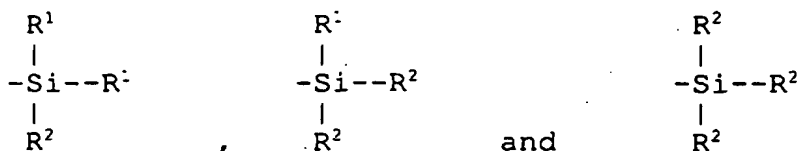

where


R<sup>1</sup> is an alkyl group of 1 to 4 carbon atoms, cyclohexyl or phenyl;

R<sup>2</sup> is alkoxy of 1 to 8 carbon atoms, or cycloalkoxy of 5 to 8 carbon atoms;

Alk is a divalent hydrocarbon of 1 to 18 carbon atoms and n is an integer of 2 to 8.

**[0035]** Specific examples of sulfur containing organosilicon compounds which may be used in accordance with the present invention include: 3,3'-bis(trimethoxysilylpropyl) disulfide, 3,3'-bis(triethoxysilylpropyl) tetrasulfide, 3,3'-bis(triethoxysilylpropyl) octasulfide, 3,3'-bis(trimethoxysilylpropyl) tetrasulfide, 2,2'-bis(triethoxysilylethyl) tetrasulfide, 3,3'-bis(trimethoxysilylpropyl) trisulfide, 3,3'-bis(triethoxysilylpropyl) trisulfide, 3,3'-bis(tributoxysilylpropyl) disulfide, 3,3'-bis(trimethoxysilylpropyl) hexasulfide, 3,3'-bis(trimethoxysilylpropyl) octasulfide, 3,3'-bis(trioctoxysilylpropyl) tetrasulfide, 3,3'-bis(triethoxysilylpropyl) disulfide, 3,3'-bis(tri-2"-ethylhexoxysilylpropyl) trisulfide, 3,3'-bis(triisooctoxysilylpropyl) tetrasulfide, 3,3'-bis(tri-*t*-butoxysilylpropyl) disulfide, 2,2'-bis(methoxy diethoxy silyl ethyl) tetrasulfide, 2,2'-bis(tripropoxysilylethyl) pentasulfide, 3,3'-bis(tricyclohexoxysilylpropyl) tetrasulfide, 3,3'-bis(tricyclopentoxysilylpropyl) trisulfide, 2,2'-bis(tri-2"-methylcyclohexoxysilylethyl) tetrasulfide, bis(trimethoxysilylmethyl) tetrasulfide, 3-methoxy ethoxy propoxysilyl 3'-diethoxybutoxysilylpropyltetrasulfide, 2,2'-bis(dimethyl methoxysilylethyl) disulfide, 2,2'-bis(dimethyl sec.butoxysilylethyl) trisulfide, 3,3'-bis(methyl butylethoxysilylpropyl) tetrasulfide, 3,3'-bis(di-*t*-butylmethoxysilylpropyl) tetrasulfide, 2,2'-bis(phenyl methyl methoxysilylethyl) trisulfide, 3,3'-bis(diphenyl isopropoxysilylpropyl) tetrasulfide, 3,3'-bis(diphenyl cyclohexoxysilylpropyl) disulfide, 3,3'-bis(dimethyl ethylmercaptosilylpropyl) tetrasulfide, 2,2'-bis(methyl dimethoxysilylethyl) trisulfide, 2,2'-bis(methyl ethoxypropoxysilylethyl) tetrasulfide, 3,3'-bis(diethyl methoxysilylpropyl) tetrasulfide, 3,3'-bis(ethyl di-sec. butoxysilylpropyl) disulfide, 3,3'-bis(propyl diethoxysilylpropyl) disulfide, 3,3'-bis(butyl dimethoxysilylpropyl) trisulfide, 3,3'-bis(phenyl dimethoxysilylpropyl) tetrasulfide, 3-phenyl ethoxybutoxysilyl 3'-trimethoxysilylpropyl tetrasulfide, 4,4'-bis(trimethoxysilylbutyl) tetrasulfide, 6,6'-bis(triethoxysilylhexyl) tetrasulfide, 12,12'-bis(triisopropoxysilyl dodecyl) disulfide, 18,18'-bis(trimethoxysilyloctadecyl) tetrasulfide, 18,18'-bis(tripropoxysilyloctadecyl) tetrasulfide, 4,4'-bis(trimethoxysilylbuten-2-yl) tetrasulfide, 4,4'-bis(trimethoxysilylcyclohexylene) tetrasulfide, 5,5'-bis(dimethoxymethylsilylpentyl) trisulfide, 3,3'-bis(trimethoxysilyl-2-methylpropyl) tetrasulfide, 3,3'-bis(dimethoxyphenylsilyl-2-methylpropyl) disulfide.

**[0036]** The preferred sulfur containing organosilicon compounds are the 3,3'-bis(trimethoxy or triethoxy silylpropyl) sulfides. The most preferred compound is 3,3'-bis(triethoxysilylpropyl) tetrasulfide. Therefore, as to Formula I, preferably Z is




where R<sup>2</sup> is an alkoxy of 2 to 4 carbon atoms, with 2 carbon atoms being particularly preferred; Alk is a divalent hydrocarbon of 2 to 4 carbon atoms, with 3 carbon atoms being particularly preferred; and n is an integer of from 3 to 5, with 4 being particularly preferred.

**[0037]** The amount of the sulfur containing organosilicon compound of Formula I in a rubber composition will vary depending on the level of silica that is used. Generally speaking, the amount of the compound of Formula II, if used, will range from 0.01 to 1.0 parts by weight per part by weight of the silica. Preferably, the amount will range from 0.05 to 0.4 parts by weight per part by weight of the silica.

**[0038]** The rubber compositions of the present invention may contain a methylene donor and a methylene acceptor. The term "methylene donor" is intended to mean a compound capable of reacting with a methylene acceptor (such as resorcinol or its equivalent containing a present hydroxyl group) and generate the resin in-situ. Examples of methylene

donors which are suitable for use in the present invention include hexamethylenetetramine, hexaethoxymethylmelamine, hexamethoxymethylmelamine, lauryloxymethylpyridinium chloride, ethoxymethylpyridinium chloride, trioxan hexamethoxymethylmelamine, the hydroxy groups of which may be esterified or partly esterified, and polymers of formaldehyde such as paraformaldehyde. In addition, the methylene donors may be N-substituted oxymethylmelamines, of the general formula:

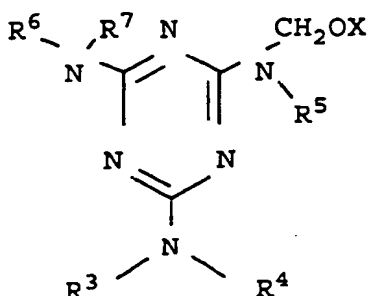

II

wherein X is an alkyl having from 1 to 8 carbon atoms, R<sup>3</sup>, R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> are individually selected from the group consisting of hydrogen, an alkyl having from 1 to 8 carbon atoms and the group -CH<sub>2</sub>OX. Specific methylene donors include hexakis-(methoxymethyl)melamine, N,N',N''-trimethyl/N,N',N''-trimethylolmelamine, hexamethylolmelamine, N,N',N''-dimethylolmelamine, N-methylolmelamine, N,N'-dimethylolmelamine, N,N',N''-tris(methoxymethyl)melamine and N,N',N''-tributyl-N,N',N''-trimethylol-melamine. The N-methylol derivatives of melamine are prepared by known methods.

**[0039]** The amount of methylene donor and methylene acceptor that is present in the rubber stock may vary. Typically, the amount of methylene donor and methylene acceptor that are present will range from 0.1 phr to 10.0 phr. Preferably, the amount of methylene donor and methylene acceptor ranges from 2.0 phr to 5.0 phr for each.

**[0040]** The weight ratio of methylene donor to the methylene acceptor may vary. Generally speaking, the weight ratio will range from 1:10 to 10:1. Preferably, the weight ratio ranges from 1:3 to 3:1.

**[0041]** It is readily understood by those having skill in the art that the rubber composition would be compounded by methods generally known in the rubber compounding art, such as mixing the various sulfur-vulcanizable constituent rubbers with various commonly used additive materials. As known to those skilled in the art, depending on the intended use of the sulfur vulcanizable and sulfur-vulcanized material (rubbers), the additives mentioned below are selected and commonly used in conventional amounts. Representative examples of sulfur donors include elemental sulfur (free sulfur), an amine disulfide, polymeric polysulfide and sulfur olefin adducts. Preferably, the sulfur vulcanizing agent is elemental sulfur. The sulfur vulcanizing agent may be used in an amount ranging from 0.5 to 8 phr, with a range of from 1.5 to 6 phr being preferred. Typical amounts of processing oils comprise 1 to 50 phr. Such processing aids can include, for example, aromatic, naphthenic and/or paraffinic processing oils. Typical amounts of antioxidants comprise 1 to 5 phr. Representative antioxidants may be, for example, diphenyl-p-phenylenediamine and others, such as, for example, those disclosed in the Vanderbilt Rubber Handbook (1978), pages 344-346. Typical amounts of antiozonants comprise 1 to 5 phr. Typical amounts of fatty acids, if used, which can include stearic acid comprise 0.5 to 3 phr. Typical amounts of zinc oxide comprise 2 to 5 phr. Typical amounts of microcrystalline and paraffinic waxes comprise 1 to 10 phr. Often microcrystalline waxes are used. Typical amounts of peptizers comprise 0.1 to 1 phr. Typical peptizers may be, for example, pentachlorothiophenol and dibenzamidodiphenyl disulfide.

**[0042]** Accelerators are used to control the time and/or temperature required for vulcanization and to improve the properties of the vulcanizate. In one embodiment, a single accelerator system may be used; i.e., primary accelerator. The primary accelerator(s) may be used in total amounts ranging from 0.5 to 4, preferably 0.8 to 2.5, phr. In another embodiment, combinations of a primary and a secondary accelerator might be used with the secondary accelerator being used in smaller amounts, such as from 0.05 to 3 phr, in order to activate and to improve the properties of the vulcanizate. Combinations of these accelerators might be expected to produce a synergistic effect on the final properties and are somewhat better than those produced by use of either accelerator alone. In addition, delayed action accelerators may be used which are not affected by normal processing temperatures but produce a satisfactory cure at ordinary vulcanization temperatures. Vulcanization retarders might also be used. Suitable types of accelerators that may be used in the present invention are amines, disulfides, guanidines, thioureas, thiazoles, thiurams, sulfenamides, dithiocarbamates and xanthates. Preferably, the primary accelerator is a sulfenamide. If a second accelerator is used, the sec-

ondary accelerator is preferably a guanidine, dithiocarbamate or thiuram compound.

[0043] The mixing of the rubber composition can be accomplished by methods known to those having skill in the rubber mixing art. For example, the ingredients are typically mixed in at least two stages; namely, at least one non-productive stage followed by a productive mix stage. The final curatives including sulfur vulcanizing agents are typically mixed in the final stage which is conventionally called the "productive" mix stage in which the mixing typically occurs at a temperature, or ultimate temperature, lower than the mix temperature(s) than the preceding non-productive mix stage(s). The rubber and polymeric resin are mixed in one or more non-productive mix stages. The terms "non-productive" and "productive" mix stages are well known to those having skill in the rubber mixing art.

[0044] Vulcanization of the pneumatic tire of the present invention is generally carried out at conventional temperatures ranging from 100°C to 200°C. Preferably, the vulcanization is conducted at temperatures ranging from 110°C to 180°C. Any of the usual vulcanization processes may be used such as heating in a press or mold, heating with superheated steam or hot air or in a salt bath.

[0045] The following examples are presented in order to illustrate but not limit the present invention.

[0046] In the following examples, the Flexsys Rubber Process Analyzer (RPA) 2000 was used to determine dynamic mechanical rheological properties. The curing conditions were 160°C, 1.667 Hz, 15.8 minutes and 0.7 percent strain. A description of the RPA 2000, its capability, sample preparation, tests and subtests can be found in these references. H A Pawlowski and J S Dick, Rubber World, June 1992; J S Dick and H A Pawlowski, Rubber World, January 1997; and J S Dick and J A Pawlowski, Rubber & Plastics News, April 26 and May 10, 1993.

[0047] The compounded rubber sample is placed on the bottom die. When the dies are brought together, the sample is in a pressurized cavity where it will be subjected to a sinusoidal oscillating shearing action of the bottom die. A torque transducer connected to the upper die measures the amount of torque transmitted through the sample as a result of the oscillations. Torque is translated into the shear modulus, G, by correcting for the die form factor and the strain. The RPA 2000 is capable of testing uncured or cured rubber with a high degree of repeatability and reproducibility. The tests and subtests available include frequency sweeps at constant temperature and strain, curing at constant temperature and frequency, strain sweeps at constant temperature and frequency and temperature sweeps at constant strain and frequency. The accuracy and precision of the instrument allows reproducible detection of changes in the compounded sample.

[0048] The values reported for the storage modulus, (G'), loss compliance (J'') and tan delta are obtained from a strain sweep at 100°C and 1 Hz following the cure test. These properties represent the viscoelastic response of a test sample to shear deformation at a constant temperature and frequency.

#### EXAMPLE 1

[0049] Three hundred parts of cyclohexane and 50 parts of anhydrous aluminum chloride were placed into a reactor. While continuously stirring the mixture, 600 parts of a hydrocarbon mixture was slowly added to the reactor over a period of 60 minutes. The hydrocarbon mixture consisted of 30 percent inert hydrocarbons with the remaining 70 percent by weight of the mixture comprising the following resin forming components:

Component	Percent
Limonene	25.0
Dimethyl-dicyclopentadiene	25.0
Indene	25.0
Vinyl Toluene	25.0

[0050] The temperature of the reaction was maintained in a range of 25° to 30°C. After an hour of agitation from the time of final addition, the hydrocarbon mixture was added to approximately 4,000 parts of a 25 percent solution of isopropyl alcohol in water to neutralize and decompose the aluminum chloride. The aqueous layer was removed and the resin solution washed with an additional 4,000 parts of the alcohol/water blend.

[0051] The resulting resin solution was dried at 70°C under 29 in of Hg vacuum. The resulting resin was cooled to room temperature to form 400 parts of a hard brittle pale yellow resin having a capillary tube softening point of 120 to 128°C. Small molecule GPC analysis gives a molecular weight distribution of 7.1 percent in the 11,600 MW range, 52.4 percent in the 3860 MW range, 35.1 percent in the 1810 MW range and 5.4 percent in the 480 MW range.

**EXAMPLE 2**

[0052] In this example, the resin of Example 1 was evaluated in a rubber compound.

[0053] Rubber compositions containing the materials set out in Tables I and II were prepared in a BR Banbury™ mixer using two separate stages of addition (mixing); namely, one non-productive mix stage and one productive mix stage. The non-productive stage was mixed for 3.5 minutes or to a rubber temperature of 160°C, whichever occurred first. The mixing time for the productive stage was to a rubber temperature of 120°C.

[0054] The rubber compositions are identified herein as Samples 1 and 2. Samples 1 is considered herein as a control without the use of the resin used in the present invention being added to the rubber composition. Sample 1 contains a commercially available coumarone Indene resin. Sample 2 is the resin prepared in Example 1.

[0055] The samples were cured at 150°C for 28 minutes.

[0056] Table II illustrates the behavior and physical properties of the cured Samples 1-3.

Table I

Samples	Ctrl 1	2
<b>Non-Productive</b>		
Solution SBR <sup>1</sup>	100	100
Carbon Black <sup>2</sup>	90.0	90.0
Aromatic Oil	45	45
Stearic Acid	1.0	1.0
Zinc Oxide	1.25	1.25
Antioxidant <sup>3</sup>	0.7	0.7
Coumarone Indene <sup>4</sup> Resin	20	0
Resin of Example 1	0	20
<b>Productive</b>		
Accelerators <sup>5</sup>	2.5	2.5
Accelerator <sup>6</sup>	0.21	0.21
Sulfur	1.28	1.28

<sup>1</sup>Solution SBR containing 40% styrene, a Tg of -16°C and a base Mooney of 85-95. The solution SBR was obtained from The Goodyear Tire & Rubber Company.

<sup>2</sup>I<sub>2</sub>=122 and DBP=114

<sup>3</sup>Polymerized 1,2-dihydro-2,2,4-trimethylquinoline

<sup>4</sup>Coumarone Indene Resin having a softening point of 100°C which is commercially available from Neville Chemical under the designation Cumar™ R-13.

<sup>5</sup>N-cyclohexyl benzothiazole-2-sulfenamide

<sup>6</sup>Tetramethyl thiuram disulfide



Table II

Samples	1	2
Coumarone Indene Resin	20	0
DM-DCPD/Limonene/Vinyl Toluene/Indene (1:1:1:1)	0	20
<u>UTS, cure 28 min @ 150°C</u>		
Modulus, 300% (MPa)	4.8	4.8
Break Str (MPa)	11.4	10.8
Elongation, %	610	628
<u>HOT (100C) UTS, cure 28 min @ 150C</u>		
Modulus, 300% (MPa)	3.26	2.66
Break Str (MPa)	7.2	7.19
Elongation, %	584	704
Energy (N-cm)	610	814
<u>RPA 2000</u>		
<u>Cure: 160C, 1.677 Hz, 15.8 minutes, 0.7% Strain</u>		
Min Torque	0.66	0.6
Max Torque	3.35	3.69
Delta Torque	2.69	3.09
T'02 (min)	0.52	0.172
T'25 (min)	2.17	2.05
T'90 (min)	8.43	8.39
<u>Strain Sweep: 100C, 11 Hz</u>		
G' (kPa) at 40% Strain	526	524
Tan Delta at 40% Strain	0.252	0.305
J" (1/MPa) at 40% Strain	0.451	0.532

**[0057]** The Dimethyl DCPD/Limonene/Vinyl Toluene/Indene resin in Sample 2 imparts a dry traction advantage with equal durability over the Coumarone Indene control (Sample 1). Equal cornering stiffness and handling is provided due to the 300 percent modulus and dynamic modulus (G') at 40 percent strain. Although room temperature tensile strength may be slightly down, 100C Tensile is equal and Energy to Break at 100C is significantly increased which should provide at least equal or improved graining and blistering resistance of the tread. The loss compliance (J") and tan delta at 40 percent strain were markedly increased which indicates improved traction. This resin improves the tradeoff between traction and durability that is present with conventional materials.

#### Claims

1. A polymeric resinous material characterized by

- (a) from 5 to 70 weight percent units derived from limonene;
  - (b) from 5 to 70 weight percent units derived from dimethyl-dicyclopentadiene;
  - (c) from 5 to 45 weight percent units derived from indene; and
  - (d) from 5 to 45 weight percent units derived from vinyl toluene;
- wherein the sum of the weight percent units derived from limonene and dimethyl-dicyclopentadiene range from 40 to 75 weight percent units of the resin and the sum of the weight percent units derived from indene and vinyl toluene range from 25 to 60 weight percent units of the resin.

2. The polymeric resinous material according to claim 1 characterized in that said polymeric resinous material has a softening point of from 100°C to 165°C.
3. The polymeric resinous material according to claim 1 characterized in that the weight ratio of limonene:dimethyldicyclopentadiene:indene:vinyl toluene is 1:1:1:1.
4. The polymeric resinous material according to claim 1 characterized in that the polymeric resinous material is modified by containing up to 25 weight percent units derived from other unsaturated hydrocarbons containing from 9 to 10 carbon atoms.
5. The polymeric resinous material according to claim 4 characterized in that the said other unsaturated hydrocarbons containing from 9 to 10 carbon atoms are selected from 3-methyl styrene, 4-methyl styrene, 1-methyl indene, 2-methyl indene, 3-methyl indene and mixtures thereof.
6. A rubber composition characterized by (a) a diene-based elastomer containing olefinic unsaturation and (b) 1 to 80 phr of the polymeric resinous material of claims 1 through 5.
7. The rubber composition according to claim 6 characterized in that said elastomer containing olefinic unsaturation is selected from the group consisting of natural rubber, neoprene, polyisoprene, polybutadiene, styrene-butadiene copolymer, styrene/isoprene/butadiene rubber, methyl methacrylate-butadiene copolymer, styrene-isoprene copolymer, methyl methacrylate-isoprene copolymer, acrylonitrile-isoprene copolymer, acrylonitrile-butadiene copolymer, EPDM and mixtures thereof.
8. The rubber composition according to claim 6 or 7 characterized in that a filler is present in said elastomer in an amount ranging from 10 to 250 phr.
9. A pneumatic tire having a tread characterized by the rubber composition of any of claims 6 through 8.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 2759

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 691 432 A (WILLIAMS THEODORE JOSEPH) 25 November 1997 (1997-11-25) * column 8, line 7 - line 13; claim 1 *	1-9	C08F236/20 C08F232/08 C08L21/00
A	EP 0 011 393 A (EXXON RESEARCH ENGINEERING CO) 28 May 1980 (1980-05-28) * abstract; claims * * page 6, line 1 - page 7, paragraph 4 * * page 9, last paragraph *	1-9	
P, A	EP 0 990 669 A (GOODYEAR TIRE & RUBBER) 5 April 2000 (2000-04-05) * abstract; examples *	1-9	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C08F C08L
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>3 October 2000</b>	Examiner <b>Mettler, R-M</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 2759

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5691432 A	25-11-1997	US 5410004 A	25-04-1995
		US 5693731 A	02-12-1997
		CA 2140565 A	25-07-1995
		DE 69508813 D	12-05-1999
		DE 69508813 T	05-08-1999
		EP 0665246 A	02-08-1995
		JP 8048723 A	20-02-1996
EP 0011393 A	28-05-1980	GB 2032442 A	08-05-1980
		CA 1185399 A	09-04-1985
		DE 2964374 D	27-01-1983
		DK 443179 A,B,	21-04-1980
		JP 1476226 C	18-01-1989
		JP 55056113 A	24-04-1980
		JP 63027367 B	02-06-1988
EP 0990669 A	05-04-2000	CN 1253959 A	24-05-2000
		JP 2000204274 A	25-07-2000

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82